


## DURACO BUMPERS

**Material Description:** Duraco Bumpers are available in clear and black colors. They are made of polyurethane material with a high performance acrylic based adhesive. These products do not contain plasticizers, oils or fillers. They offer excellent non-slip properties and will not scratch or stain any surface.

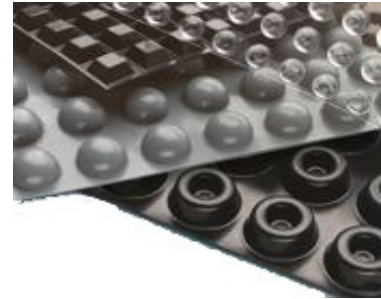

**Typical applications include:** cabinet doors, appliance and office equipment, electronics, furniture and many more.

Product Information	Description
Material:	Polyurethane
Color:	Clear / Black
Adhesive:	Acrylic
Release Liner	White Kraft
Application Temperature (°F)	65 to 100
Service Temperature (°F)	-40 to 300

Material	Typical Properties
Tensile Strength (psi) :	627
Elongation (% to break):	192
Tear Strength (g/cm):	214
Hardness, Shore A:	60-70
Bashore Rebound (%):	27
Abrasion Resistance, g/1000 cycles Tabor 18, 1 kg:	0.016
QUV (500 hours):	Slight Yellowing
Flammability UL94-HBF:	Passes

Adhesive	Typical Value	Test Method
Static Shear (hours):	500	PSTC-07 / ASTM B3654
Peel Adhesion (oz/in):	64	PSTC-3 / ASTM D3330

\*Tests are performed on 2 mil PET

### Storage

Tape should be stored within its' original packaging, in a dry place at Room Temperature (72°F). If room temperature is not possible, the storage temperatures should not exceed 39°F to 100°F. When the tape is stored under these conditions, the shelf life would be 18 months from the date of shipment.

Duraco provides this information and recommendations for informative purposes only. The data is intended as a guide only and is presented without guarantees and without assumption of liabilities resultant from the use of information provided.